

AGE[®]

A specially designed heavy-duty 2 speed 2000W motor for dry drilling of reinforced concrete up to 162mm, and standard dry drilling up to 262mm.

DM62 | DRY DIAMOND CORE DRILL MOTOR

10201-006-211-6062-003-026

Magnesium alloy motor housing for minimal weight and maximum strength.

Tubular Spirit Level for precision

Soft grip handle for maximum comfort

Built in vertical level.



LED load indicator light for optimizing drilling efficiency with overload and overheat warning



Handle inline with spindle for precise control

Switchable soft percussion for optimized dry drilling

	MODEL
	DM62
Power Input	2000 Watt
Voltage	220-240V
Frequency	50-60Hz
Rated Load Speeds min -1	Speed 1: 750 Speed 2: 1140
Percussion Frequency	Speed 1: 20 000 bpm Speed 2: 30 400 bpm
Capacity-Dry (Reinforced Concrete)	162mm (6 1/4")
Capacity-Dry (Brick)	262mm (10 5/16")
Spindle Thread	1 1/4" UNC male & 1/2" BSP female
Protection Class	Class II
Dimensions(LxWxH)(mm)	430 x 290 x 122
Net Weight	6,2kg (13,64 Lbs)
Cable length	3m


DM62 | DRY DIAMOND CORE DRILL MOTOR

10201-006-211-6062-003-026



ADD quick release dry drilling equipment

- 1. Centering pilot, ADD
0202-0111-00000-009
- 2. Extension 200mm
0299-0114-00000-005
- 3. ADD quick release
0299-0114-00000-004
- 4. 1 1/4" to ADD M42 Adaptor
301-03022-000-003

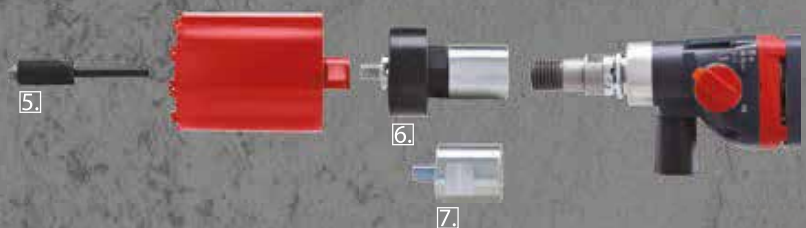

M16 dry drilling equipment

- 5. Centering Pilot
0202-0111-00000-008
- 6. M16 dust extractor
0299-0114-00000-003
- 7. M16 Adaptor
302-04311-903-010

Related Products



AS200
0299-0132-00000-056



Vacuum Cleaner DS25L
305-00371-000-001



Sharpening plate
305-00372-000-001

AGP®



HIPPO tools

info@hippotools.be • 011.29 12 07